

FACADE LUMANDAR

AS4-CRS



SECONDARY NETWORK SWITCH BOX FOR FAÇADE INSTALLATION PROGRAMMABLE BY SMARTPHONE

DESCRIPTION

Lumandar AS4-CRS is a Class II façade box, incorporating a programmable autonomous astronomical clock in Bluetooth secured by Android or IOS Smartphone, with power switching.

Its main application is the independent control of secondary networks.

The software offers programming capabilities (location, weekly and exceptional cut-off) and consultation capabilities (date, time, upcoming night instructions).

Access to programming can be secured by a PIN code.

FEATURES AND ADVANTAGES

- Single-phase switch control for secondary public lighting networks
- Compatible with astronomical and inter-twilight clock control devices present in the main network start cabinet
- Pre-wired box for installation in place of a Class II façade box
- Screw or strap mounting
- The connection can accommodate 3 15mm cables, suitable for distribution with 2 4x6mm² cables or 2 2x10mm² cables + 1 cable for local luminaire
- Switch power: 1KW (SHP/IM) or 3KW (all load types)
- Intuitive Smartphone programming via Lumandar AS4 application with:
 - 1 weekly daily program (1 cut-off/night)
 - 20 exceptional annual periods (2 cutoffs/night)



- Automatic and configurable summer / wintertime change
- Four-digit PIN code locking

POSSIBLE APPLICATIONS

- Control of public lighting secondary networks

*Warranty:
10 years: AS4 clock housing;
6 years: other equipment

FACADE LUMANDAR

AS4-CRS



DIAGRAMS

Figure 1: Box diagram

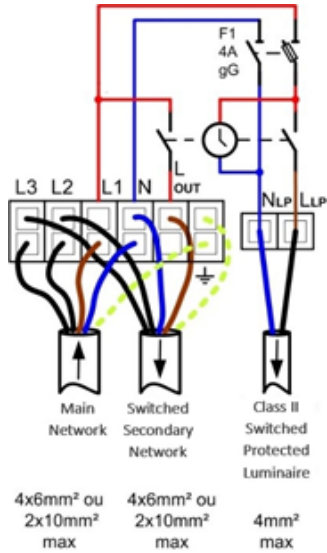


Figure 2: Secondary switch example


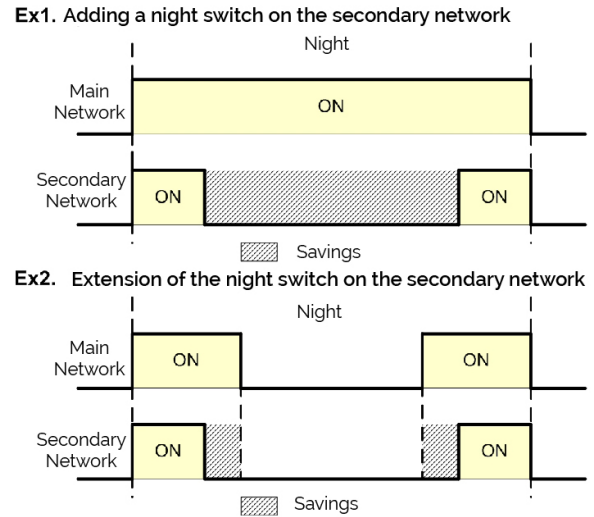


Figure 3: Connection example

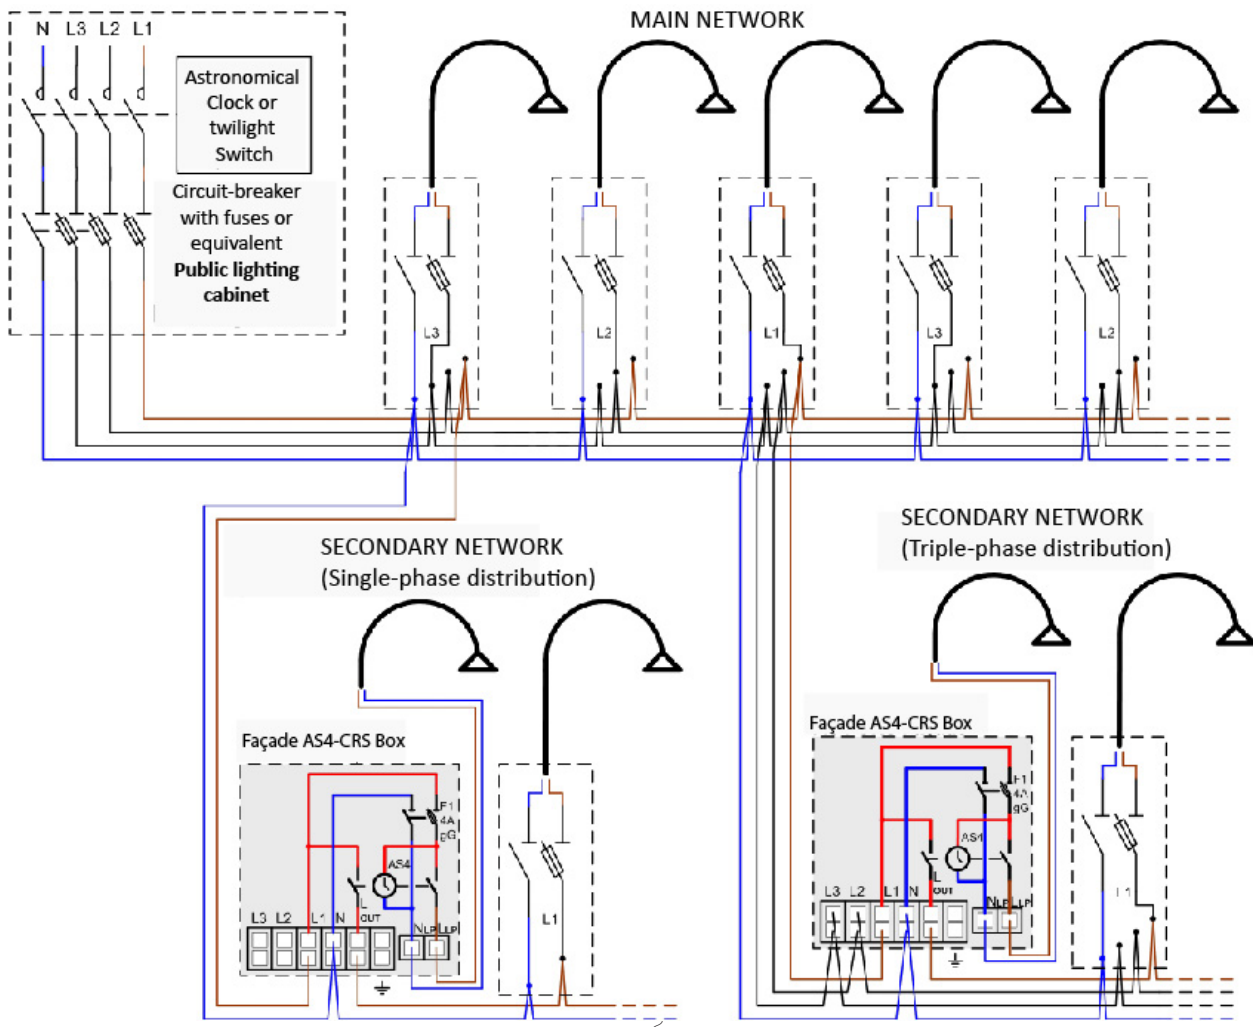

FACADE LUMANDAR


AS4-CRS



Figure 4: Switch power

Settings	FF-LCAS4CRS-F1M features	FF-LCAS4CRS-F3M features
Outputs	2 phase switching outputs	2 phase switching outputs
L LP / N LP : Local luminaire Incandescent or halogen lamp	Max 6A/250Vac cos φ =1 / AC-1 Max 1500 W (F1 fuse to replace with 6A)	Max 6A/250Vac cos φ =1 / AC-1 Max 1500 W (F1 fuse to replace with 6A)
Balanced ferromagnetic ballast discharge lamp	Max 300 W / 45 μF Number of lamps: 3 x 70 W @12μF 3 x 100 W @12μF 2 x 150 W @ 20μF 1 x 250 W @ 32μF	Max 300 W / 45 μF Number of lamps: 3 x 70 W @12μF 3 x 100 W @12μF 2 x 150 W @ 20μF 1 x 250 W @ 32μF
Electronic ballast LED lamp	Typ 150W / Peak current max 80A@20ms	Typ 150W / Peak current max 80A@20ms
L OUT / N : Secondary network Incandescent or halogen lamp	Max 2000 W	Max 3000 W
Balanced ferromagnetic ballast discharge lamp	Max 750 W / 100 μF Number of lamps: 8 x 70 W @12μF 7 x 100 W @12μF 5 x 150 W @ 20μF 3 x 250 W @ 32μF	Max 3000 W
Electronic ballast LED lamp	Typ 200W / Peak current Max 120A	Max 3000 W

Figure 5: Box dimensions

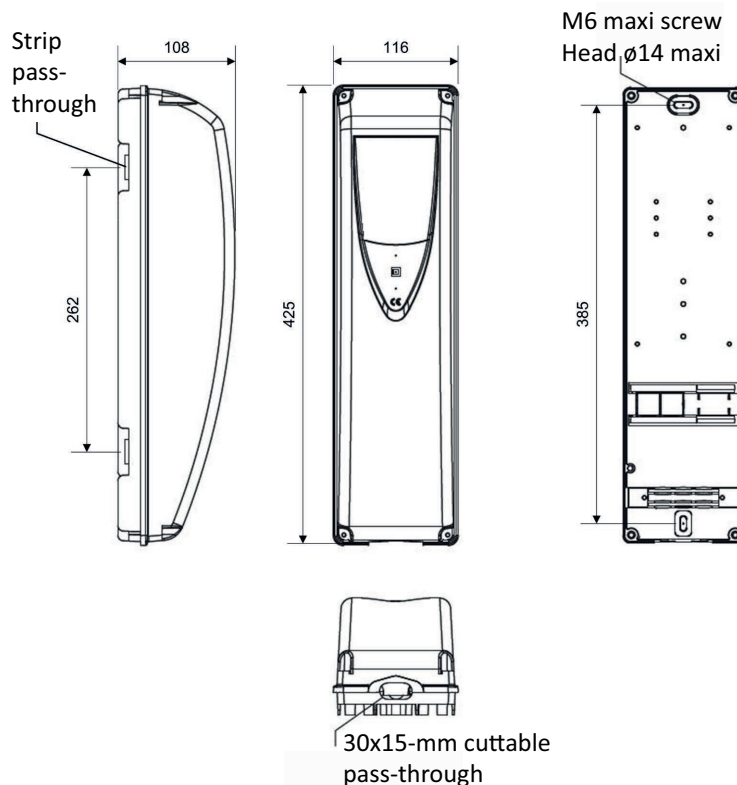



FACADE LUMANDAR

AS4-CRS



TECHNICAL SPECIFICATIONS

Settings:	Features:
Power supply	184-253 Vac / 50Hz
Consumption	1KW Version: 184 to 253Vac / 50Hz - typ. 3W or 13mA@230Vac 3KW Version: 184 to 253Vac / 50Hz - typ 4.2W or 18mA@230Vac
Outputs	2 phase switching outputs Switching power: see figure 4
Operating temp.	-20 °C to +50 °C
Time stability	With GPS antenna: ±0.3 s typ. Without GPS antenna: ±2 mn/year typ.
Backup	Programs: Permanent (EEPROM) Date and time: 72 hours without power voltage With GPS antenna, reset to automatic time as soon as the power supply is connected Without GPS antenna, manual time setting via the Lumandar AS4 app
Sealing/shock	IP44 / IK08
Communication	Bluetooth (mini 4.0)
Connection	2 4x6mm ² or 2x10mm ² cables max: Main network and switched secondary network 1 2x4 mm ² cable max: Switched local
Mounting	Mounting by a M6 screw max or by a strap (20mm)
Weight	1200 g
Conformity	Class II  
Warranty	AS4 clock housing: 10 years / Other equipment: 2 years

COMETA reserves the right to modify the documentation at any time.

COMETA SAS
 9 rue Marcel Chabloz
 F - 38400 St Martin d'Hères
 Tel: +33 (0)9 70 75 69 30
www.cometa-smartcity.fr

